Rope lubricant /
Seilpflegemittel

T 86



*Our lubricant **T86** is a very thin fluid and absorbs readily into the rope interior. It can be applied easily and cleanly with a brush or sprayed on with the handy 1 liter bottle. The rope lubricant should be applied within the range of where the ropes are in contact with the traction and/or deflection sheaves when possible since the rope "opens" there due to the deflection which permits the rope lubricant to more easily flow into the rope interior.*

Unsere Seilpflegemittel **T86** ist sehr dünnflüssig und dringt somit leicht in das Seilinnere ein. Es kann leicht und sauber mit einem Pinsel aufgetragen, bzw. mit der handlichen 1 Liter Flasche aufgespritzt werden. Das Aufbringen des Seilpflegemittels sollte nach Möglichkeit im Bereich der Treibscheibe oder Umlenkrolle(n) erfolgen. Dort „öffnet“ sich das Seil durch die Umlenkung und das Seilpflegemittel kann noch besser in das Seilinnere eindringen.

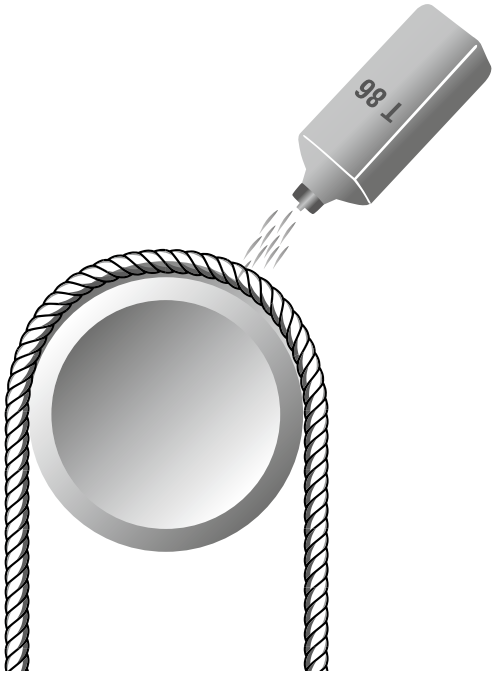

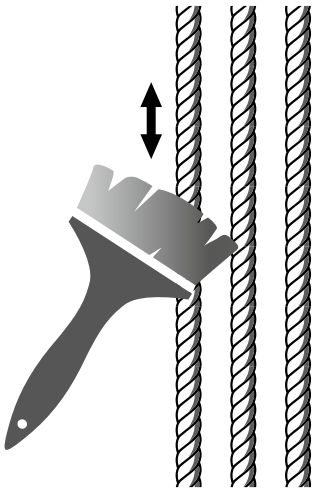

***T86** contains solvent. The flash point is 60°C and after evaporation of the solvent it is 235°C.*

*In order to extend the rope service life we recommend regular re-lubrication with our rope lubricant **T86**.*

Part no.: 4500T8601 (1 Liter) 4500T8605 (5 Liter)

T 86 enthält Lösungsmittel. Der Flammpunkt liegt bei 60°C, nach Verdunsten des Lösungsmittels liegt er bei 235°C.

Um eine hohe Seillebensdauer zu erreichen, empfehlen wir eine regelmäßige Nachschmierung mit unserem Seilpflegemittel **T86**.

Artikelnr.: 4500T8601 (1 Liter) 4500T8605 (5 Liter)